



Mechanical Power Transmission Products

sales@octaforce.com

www.octaforce.com

+91-9870809150

Mumbai, India

SKF

RENOLD

Superior Chain Technology

Lovejoy

 **ctacoup**

 **octaforce**

 **ctaSprock**

Fenner[®]

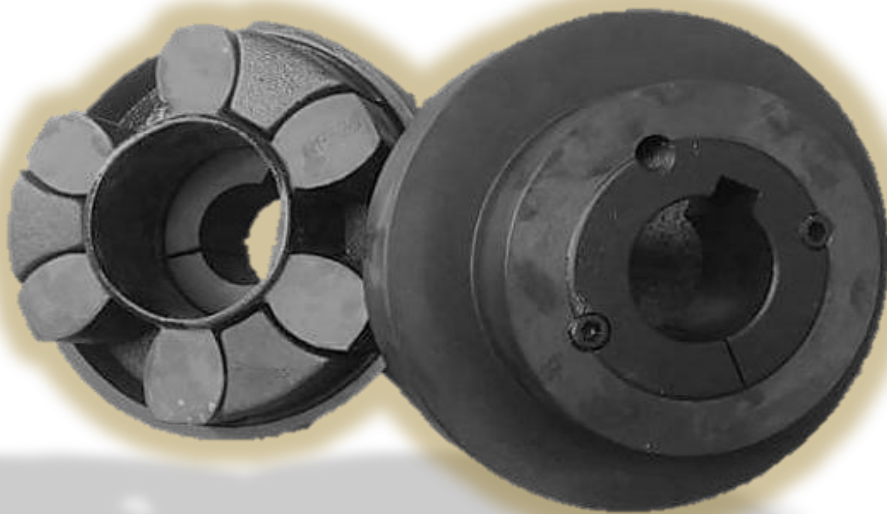

DIAMOND[®]
CHAIN COMPANY

B
R
A
N
D
S

W
E

R
E
P
R
E
S
E
N
T

HRC Couplings

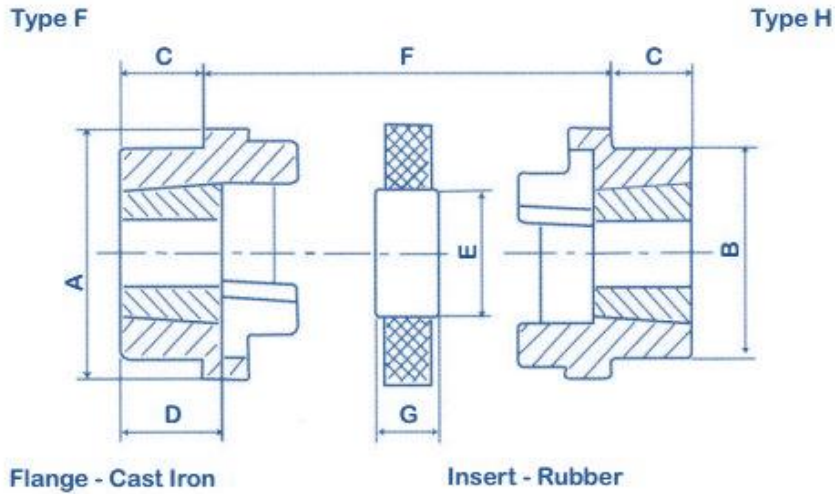


H
R
C

C
O
U
P
L
I
N
G
S

HRC Couplings

Type F and Type H Flange Cast Iron ,Inset Rubber



HRC COUPLINGS

HRC Coupling	Bush	Max Bore		Dimensions									Mass KG
		MM	INS	A	B	E	F	G	C	D	J	L	
HRC 70F-1008	1008	25	1	69	60	31	25	18	20	23.5	29	65	1
HRC 90F-1108	1108	28	1.18	85	70	32	30.5	22.5	19.5	23.5	29	69.5	1.78
HRC 110F-1610	1610	42	1.58	112	100	45	45	29	18.5	26.5	38	82	5
HRC 130F-1610	1610	42	1.58	130	105	50	53	36	18	26.5	38	89	5.46
HRC 150F-2012	2012	50	2	150	115	62	60	40	23.5	33.5	42	107	7.11
HRC 180F-2517BSW	2517	60	2.12	180	125	77	73	49	34.5	46.5	48	142	16.6
HRC 230F-3020	3020	75	3	225	155	99	85.5	59.5	39.5	52.5	55	164.5	26
HRC 280F-3525BSW	3525	100	4	275	206	119	105.5	74.5	51	66.5	67	207.5	50
HRC 70H-1008	1008	25	1	69	60	31	25	18	20	23.5	29	65	1
HRC 90H-1108	1108	28	1.18	85	70	32	30.5	22.5	19.5	23.5	29	69.5	1.78
HRC 110H-1610	1610	42	1.58	112	100	45	45	29	18.5	26.5	38	82	5
HRC 130H-1610	1610	42	1.58	130	105	50	53	36	18	26.5	38	89	5.46
HRC 150H-2012	2012	50	2	150	115	62	60	40	23.5	33.5	42	107	7.11
HRC 180H-2517BSW	2517	60	2.12	180	125	77	73	49	34.5	46.5	48	142	16.6
HRC 230H-3020	3020	75	3	225	155	99	85.5	59.5	39.5	52.5	55	164.5	26
HRC 280H-3525BSW	3525	100	4	275	206	119	105.5	74.5	51	66.5	67	207.5	50
HRC 70-S	-	32	1 1/4	69	60	31	25	18	20	23.5	-	65	-
HRC 90-S	-	42	1 5/8	85	70	32	30.5	22.5	19.5	23.5	-	69.5	-
HRC 110-S	-	55	2 1/8	112	100	45	45	29	18.5	26.5	-	82	-
HRC 130-S	-	60	2 3/8	130	105	50	53	36	18	26.5	-	89	-
HRC 150-S	-	70	2 3/4	150	115	62	60	40	23.5	33.5	-	107	-
HRC 180-S	-	80	3 1/8	180	125	77	73	49	34.5	46.5	-	142	-
HRC 230-S	-	100	4"	225	155	99	85.5	59.5	39.5	52.5	-	164.5	-
HRC 280-S	-	130	5"	275	206	119	105.5	74.5	51	66.5	-	207.5	-
HRC 70-L	-	32	1 1/4	69	60	31	25	18	20	23.5	-	65	-
HRC 90-L	-	42	1 5/8	85	70	32	30.5	22.5	26	30	-	82.5	-
HRC 110-L	-	55	2 1/8	112	100	45	45	29	37	45	-	119	-
HRC 130-L	-	60	2 3/8	130	105	50	53	36	47	55.5	-	147	-
HRC 150-L	-	70	2 3/4	150	115	62	60	40	50	60	-	160	-
HRC 180-L	-	80	3 1/8	180	125	77	73	49	58	70	-	189	-
HRC 230-L	-	100	4"	225	155	99	85.5	59.5	77	90	-	239.5	-
HRC 280-L	-	130	5"	275	206	119	105.5	74.5	90	105.5	-	285.5	-